



<b>Supplier name</b>	Arada
<b>Product Code</b>	SOL4-BIO-S5

## Dimensions


<b>Width</b> (inc. Floor Fixings)	341 mm
<b>Height</b> (inc. Hot Plate)	480 mm
<b>Depth</b> (inc. Door Handle)	385 mm

## Performance

<b>Fuel Type</b>	Bioethanol
<b>Burner capacity</b> (Max inc. Overfill 1 Litre)	0.8 Litre
<b>Nominal Heat Output To Room</b>	2.46 kW
<b>Max Burn Rate</b>	0.27 L / Hr
<b>Typical Run Time (approximate)</b>	3 to 4.5 Hrs

## Features

<b>Stove body type</b>	Freestanding
<b>Body thickness</b>	3mm Steel
<b>Cast Iron door</b>	Yes
<b>Optional decorative flue compatibility</b>	Fits standard 5inch flue collar and flue pipe
<b>Suitable for non-combustible 12mm hearth</b>	Yes
<b>Nett Weight</b>	31 Kg
<b>Gross Weight</b>	44 Kg

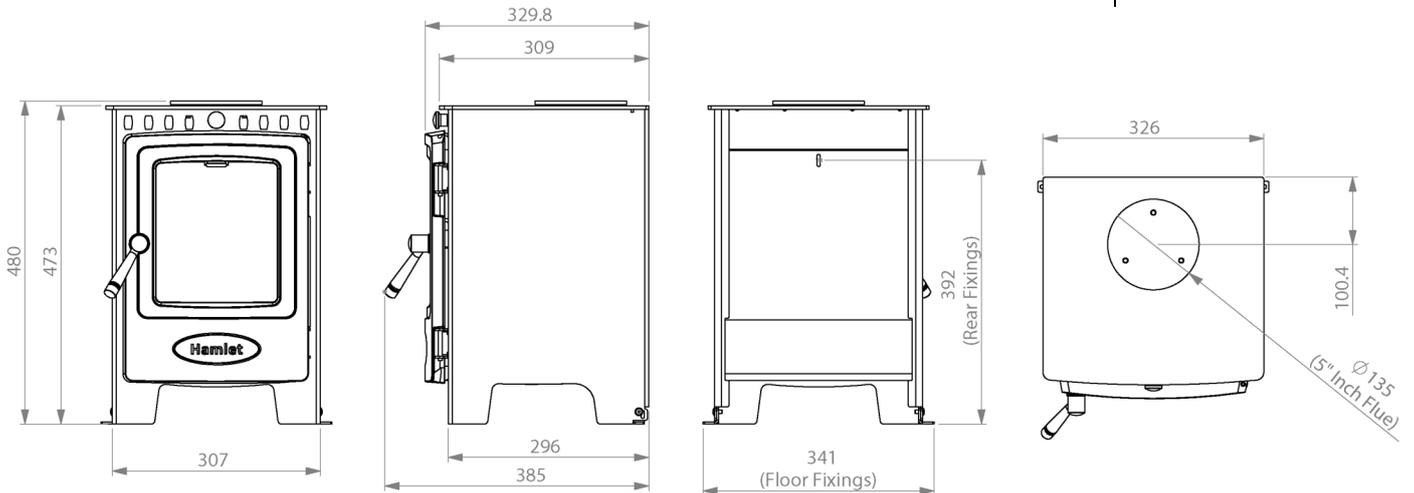

## Minimum Distance to Surrounding Materials

Install location	Rear	Per Side	Top	Notes
Alcove or recess	50 mm	75 mm	200 mm	Included limit screws must be fitted *
Freestanding	100 mm	200 mm	300 mm	Included limit screws not required *

Specific precautions to be taken when the local space heater is assembled, installed or maintained:

Product should be installed in accordance with local building regulations. Appliance will become very hot during use.

An approved (BS-EN 50291) and working Carbon Monoxide (CO) alarm should be installed in the same room where the appliance is being fired.

\* For more information please refer to document (BK778) Bioethanol Stove User Guide section 3.4

Installation and operating instructions for this stove are available online at [www.aradastoves.com/support](http://www.aradastoves.com/support)